



J SERIES / AUSTRALIA


LEOUYN
LEOUYN ENTERPRISE CO., LTD.

A SERIES (ARO) ONE-TOUCH COUPLER


- One-push connection
- Compatible with A-Series couplers (A13, A12, A11, A10)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
J21-F2	1/8" PF	44.3	19	9.5
J21-F4	1/4" PF	44.3	19	9.5
J21-F6	3/8" PF	48.3	21	12
J21-F8	1/2" PF	51.8	24	17




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
J21-M2	1/8" PT	50.8	19	10	5
J21-M4	1/4" PT	53.8	19	13	7.5
J21-M6	3/8" PT	54.8	19	14	10.5
J21-M8	1/2" PT	56.8	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J21-T4	1/4"	63.3	19	22.5	4
J21-T5	5/16"	63.3	19	22.5	6
J21-T6	3/8"	69	19	28.2	7.5
J21-T8	1/2"	72.3	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J21-H4	1/4"	69.3	19	28.5	4.5
J21-H5	5/16"	70.8	19	30	5
J21-H6	3/8"	72.3	19	31.5	7.5
J21-H8	1/2"	73.8	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
J21-P4	4 x 6	52.8	19	12	12	3
J21-P5	5 x 8	55.8	19	14	15	4
J21-P6	6.5 x 10	59.3	19	16	18.5	5
J21-P8	8 x 12	58.3	19	17	17.5	6.5



J SERIES (AUSTRALIA) DUAL BALL-SWIVEL PLUG


- 360-degree rotation for maximum mobility
- Free rotation angle up to 54 degrees
- Dual swivel points for flexible movement
- Compatible with J-Series couplers (J32, J21)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
J13-F2	1/8" PF	72.1	19	12
J13-F4	1/4" PF	74.1	19	14
J13-F6	3/8" PF	75.1	21	15
J13-F8	1/2" PF	77.1	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
J13-M2	1/8" PT	75.6	19	10	5
J13-M4	1/4" PT	78.6	19	13	7.5
J13-M6	3/8" PT	79.6	19	14	10.5
J13-M8	1/2" PT	81.6	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J13-T4	1/4"	88.1	19	22.5	4
J13-T5	5/16"	88.1	19	22.5	6
J13-T6	3/8"	93.8	19	28.2	7.5
J13-T8	1/2"	97.1	19	31.5	9




MODEL	Hose T	DIMENSIONS(mm)			
		L	H	A	ØB
J13-H4	1/4"	94.1	19	28.5	4
J13-H5	5/16"	95.6	19	30	6
J13-H6	3/8"	97.1	19	31.5	7.5
J13-H8	1/2"	98.6	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
J13-P2	4 x 6	77.6	19	12	12	3
J13-P4	5 x 8	82	19	14	16.4	4
J13-P6	6.5 x 10	84.1	19	16	18.5	5
J13-P8	8 x 12	83.1	19	17	17.5	6.5

J SERIES (AUSTRALIA) BALL-SWIVEL PLUG



- 360-degree rotation
- Free rotation angle up to 27 degrees
- Single swivel point for smooth movement
- Compatible with J-Series couplers (J32, J21)





MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
J12-F2	1/8" PF	57.2	19	12
J12-F4	1/4" PF	59.2	19	14
J12-F6	3/8" PF	60.2	21	15
J12-F8	1/2" PF	61.7	24	16





MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
J12-M2	1/8" PT	58.7	19	10	5
J12-M4	1/4" PT	61.7	19	13	7.5
J12-M6	3/8" PT	62.7	19	14	10.5
J12-M8	1/2" PT	64.7	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J12-T4	1/4"	72.2	19	22.5	4
J12-T5	5/16"	72.2	19	22.5	6
J12-T6	3/8"	77.9	19	28.2	7.5
J12-T8	1/2"	81.2	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J12-H4	1/4"	78.2	19	28.5	4.5
J12-H5	5/16"	79.7	19	30	6
J12-H6	3/8"	81.2	19	31.5	7.5
J12-H8	1/2"	82.7	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
J12-P2	4 x 6	61.7	19	12	12	3
J12-P4	5 x 8	66.1	19	14	16.4	4
J12-P6	6.5 x 10	68.2	19	16	18.5	5
J12-P8	8 x 12	67.2	19	17	17.5	6.5



J SERIES (AUSTRALIA) SWIVEL PLUG

- Smooth 360-degree parallel rotation for effortless operation
- Compatible with J-Series couplers (J32, J21)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
J11-F2	1/8" PF	49.2	17	12
J11-F4	1/4" PF	51.2	17	14
J11-F6	3/8" PF	53.2	21	15
J11-F8	1/2" PF	55.2	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
J11-M2	1/8" PT	45.2	14	10	5
J11-M4	1/4" PT	48.2	14	13	7.5
J21-M6	3/8" PT	49.2	17	14	10.5
J11-M8	1/2" PT	51.2	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J11-T4	1/4"	57.7	15	22.5	4
J11-T5	5/16"	57.7	15	22.5	6
J11-T6	3/8"	63.4	15	28.2	7.5
J11-T8	1/2"	66.7	18	31.5	9




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J11-H4	1/4"	63.7	15	28.5	4.5
J11-H5	5/16"	65.2	15	30	6
J11-H6	3/8"	66.7	15	31.5	7.5
J11-H8	1/2"	68.2	18	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
J11-P2	4 x 6	51	17	12	12	3
J11-P4	5 x 8	54	17	14	15	4
J11-P6	6.5 x 10	57.5	17	16	18.5	5
J11-P8	8 x 12	56.5	19	17	17.5	6.5

J SERIES (AUSTRALIA) STANDARD PLUG

- Compatible with J-Series couplers (J32, J21)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
J10-F2	1/8" PF	40.5	17	12
J10-F4	1/4" PF	42	17	14
J10-F6	3/8" PF	43	21	15
J10-F8	1/2" PF	46	24	16.5



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
J10-M2	1/8" PT	42.5	14	10	5
J10-M4	1/4" PT	45.5	14	13	7.5
J10-M6	3/8" PT	47	17	14	10.5
J10-M8	1/2" PT	60	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J10-T4	1/4"	55	15	22.5	4
J10-T5	5/16"	55	15	22.5	6
J10-T6	3/8"	61.2	15	28.2	7.5
J10-T8	1/2"	64.5	18	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
J10-H4	1/4"	60.7	15	28.5	4
J10-H5	5/16"	60.7	15	30	6
J10-H6	3/8"	66.4	15	31.5	7.5
J10-H8	1/2"	69.7	18	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
J10-P2	4 x 6	82.5	14	12	12	3
J10-P4	5 x 8	49.4	14	14	16.4	4
J10-P6	6.5 x 10	51.5	16	16	18.5	5
J10-P8	8 x 12	50.5	17	17	17.5	6.5

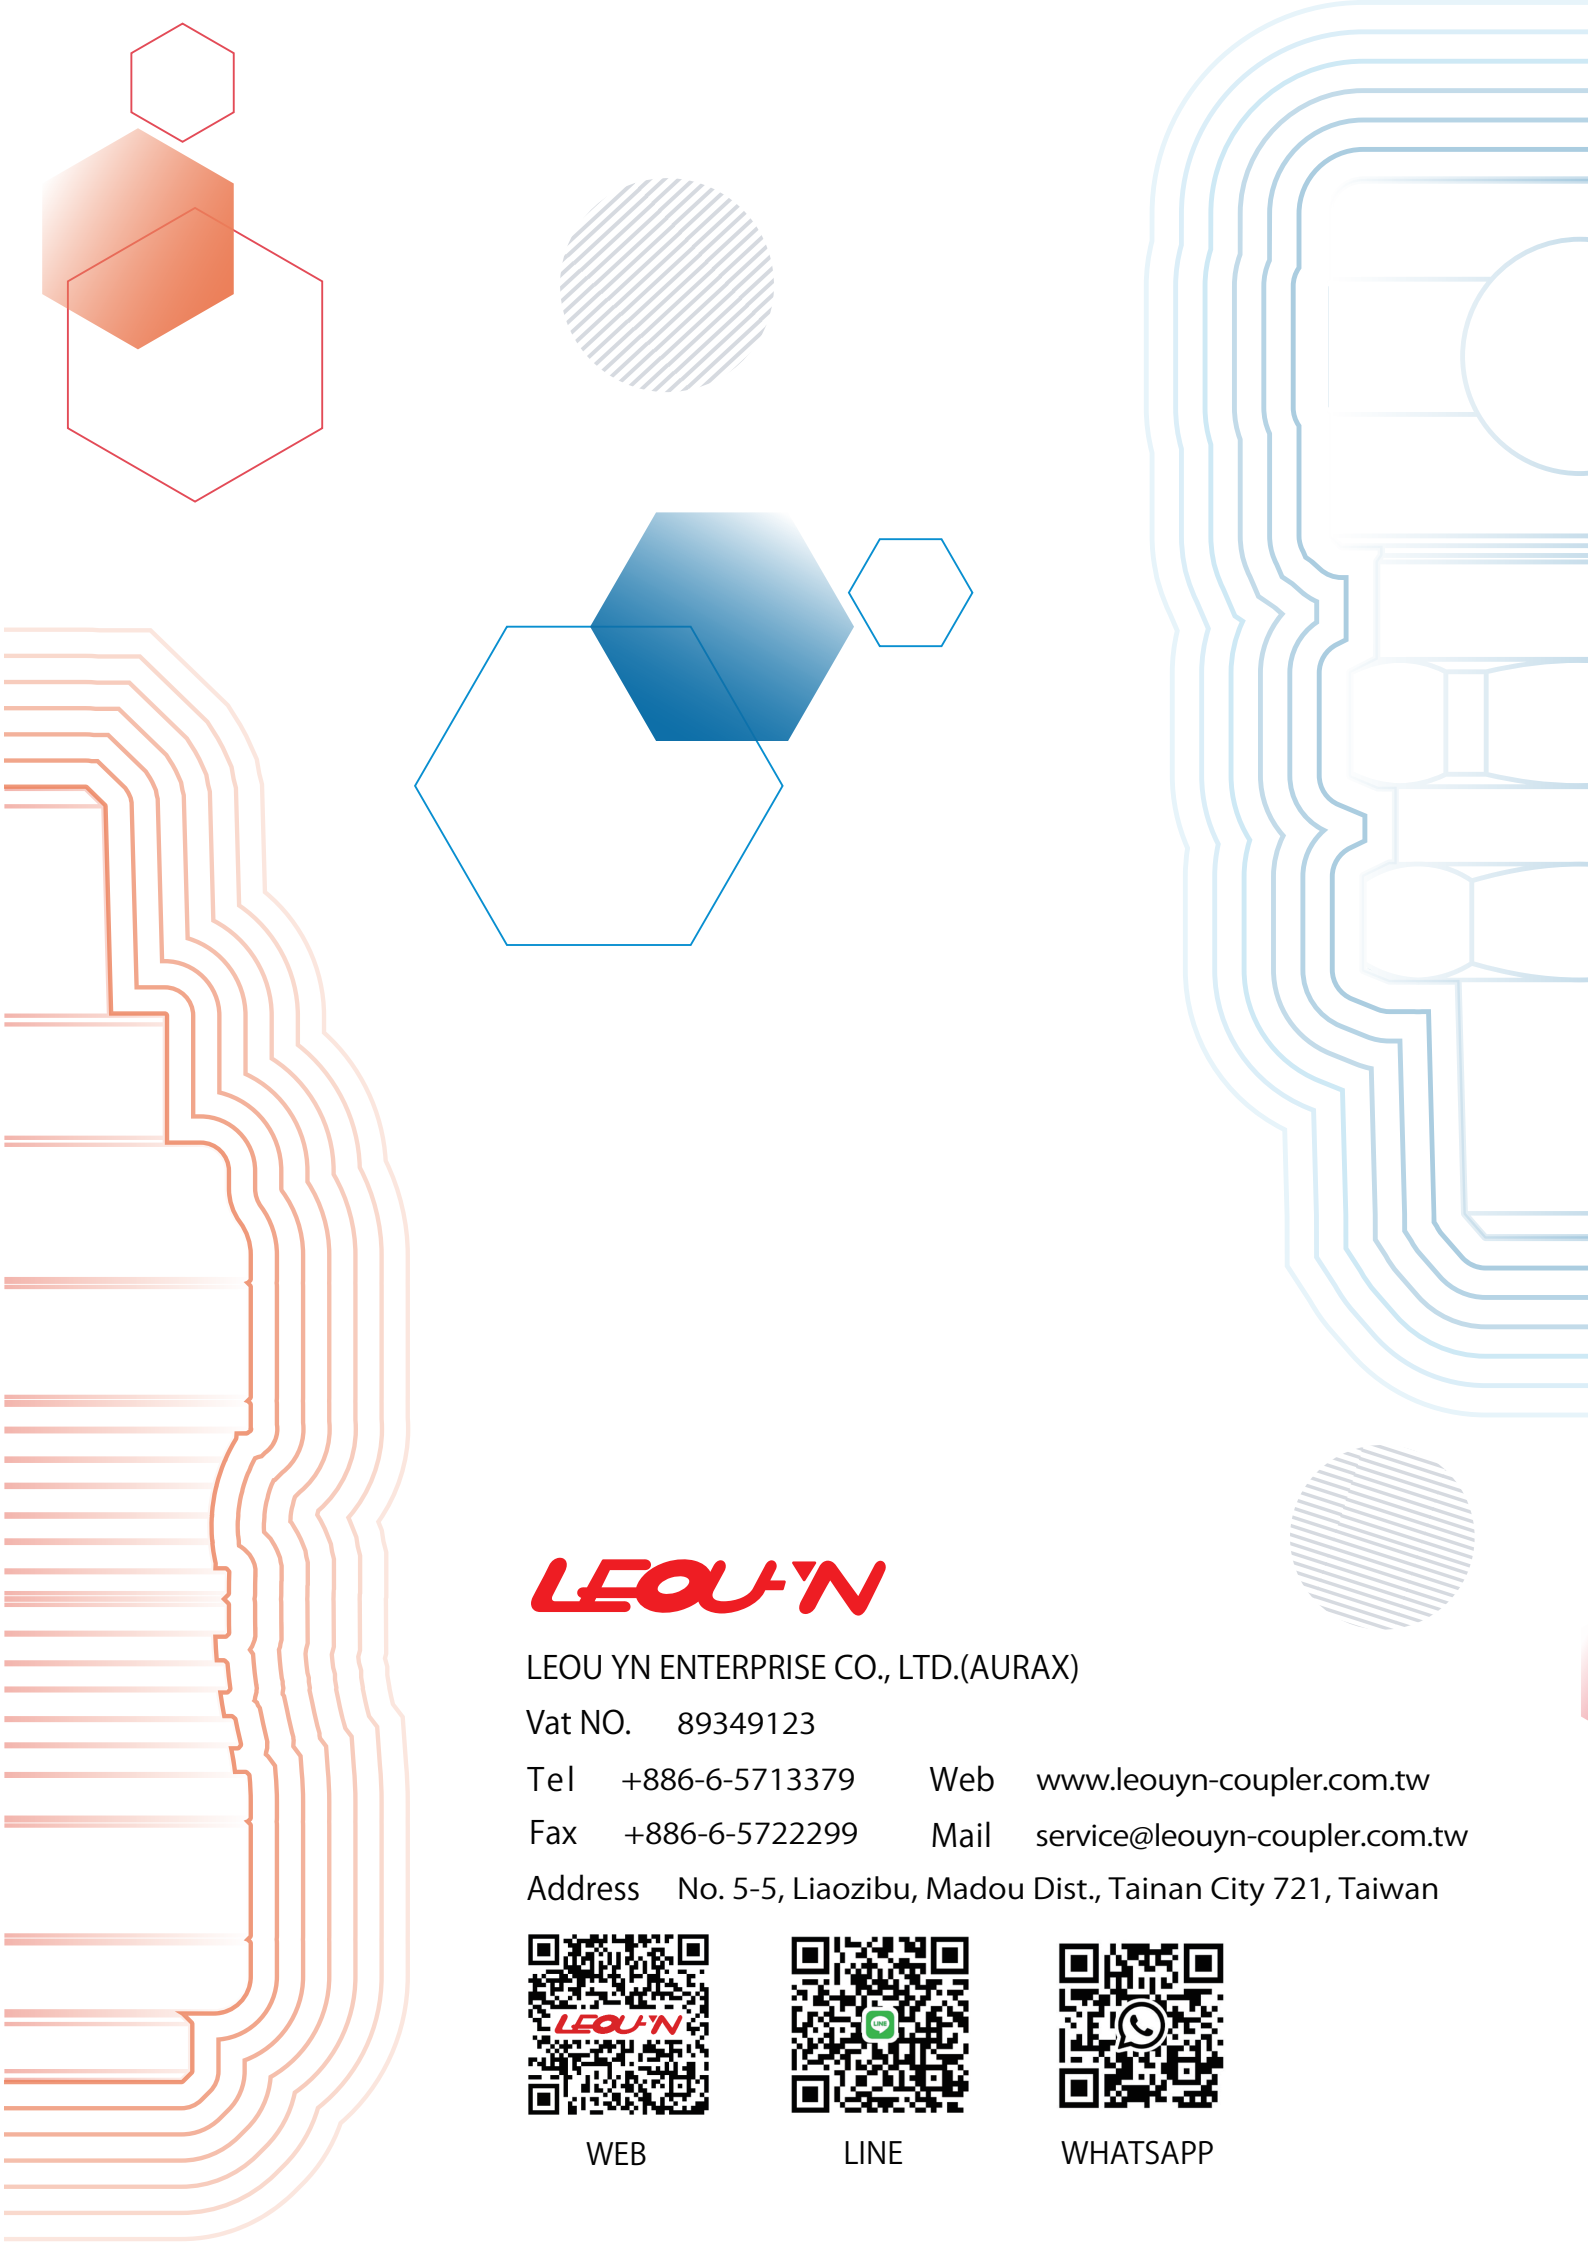

LEOUYN

LEOU YN ENTERPRISE CO., LTD.(AURAX)

Vat NO. 89349123

Tel +886-6-5713379

Web www.leouyn-coupler.com.tw

Fax +886-6-5722299

Mail service@leouyn-coupler.com.tw

Address No. 5-5, Liaozi bu, Madou Dist., Tainan City 721, Taiwan



WEB



LINE



WHATSAPP