



A SERIES / ARO

LEOUYN
LEOUYN ENTERPRISE CO., LTD.

A SERIES (ARO) SAFETY COUPLER



- One-push connection
- Safety design
- Compatible for use with A SERIES plug (A13 、 A12 、 A11 、 A10)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
A32-F2	1/8" NPF	69.5	19	12
A32-F4	1/4" NPF	69.5	19	14
A32-F6	3/8" NPF	70.5	19	15
A32-F8	1/2" NPF	72.5	22	16



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
A32-M2	1/8" NPT	71	19	10	5
A32-M4	1/4" NPT	74	19	13	7
A32-M6	3/8" NPT	75	19	14	8
A32-M8	1/2" NPT	77	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A32-T4	1/4"	83.5	19	22.5	4
A32-T5	5/16"	83.5	19	22.5	6
A32-T6	3/8"	89.2	19	28.2	7.5
A32-T8	1/2"	92.5	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A32-H4	1/4"	89.5	19	28.5	4
A32-H5	5/16"	91	19	30	5
A32-H6	3/8"	92.5	19	31.5	7.5
A32-H8	1/2"	94	19	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
A32-P4	4 x 6	73	19	12	12	3
A32-P5	5 x 8	76	19	14	15	4
A32-P6	6.5 x 10	79.5	19	16	18.5	5
A32-P8	8 x 12	78.5	19	19	17.5	6.5

A SERIES (ARO) ONE-TOUCH COUPLER

- One-push connection
- Compatible with A-Series couplers (A13, A12, A11, A10)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
A21-F2	1/8" NPF	49.3	19	12
A21-F4	1/4" NPF	51.3	19	14
A21-F6	3/8" NPF	55.3	21	15
A21-F8	1/2" NPF	56.3	24	16



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
A21-M2	1/8" NPT	52.8	19	10	5
A21-M4	1/4" NPT	55.8	19	13	7.5
A21-M6	3/8" NPT	56.8	19	14	10.5
A21-M8	1/2" NPT	58.8	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A21-T4	1/4"	65.3	19	22.5	4
A21-T5	5/16"	65.3	19	22.5	6
A21-T6	3/8"	71	19	28.2	7.5
A21-T8	1/2"	74.3	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A21-H4	1/4"	71.3	19	28.5	4.5
A21-H5	5/16"	72.8	19	30	5
A21-H6	3/8"	74.3	19	31.5	7.5
A21-H8	1/2"	75.8	19	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
A21-P4	4 x 6	54.8	19	12	12	3
A21-P5	5 x 8	57.8	19	14	15	4
A21-P6	6.5 x 10	61.3	19	16	18.5	5
A21-P8	8 x 12	60.3	19	17	17.5	6.5

A SERIES (ARO) DUAL BALL-SWIVEL PLUG


- 360-degree rotation for maximum mobility
- Free rotation angle up to 54 degrees
- Dual swivel points for flexible movement
- Compatible with A-Series couplers (A32, A21)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
A13-F2	1/8" NPF	71.1	19	12
A13-F4	1/4" NPF	73.1	19	14
A13-F6	3/8" NPF	74.1	21	15
A13-F8	1/2" NPF	76.1	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
A13-M2	1/8" NPT	74.6	19	10	5
A13-M4	1/4" NPT	77.6	19	13	7.5
A13-M6	3/8" NPT	78.6	19	14	10.5
A13-M8	1/2" NPT	80.6	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A13-T4	1/4"	87.1	19	22.5	4
A13-T5	5/16"	87.1	19	22.5	6
A13-T6	3/8"	92.8	19	28.2	7.5
A13-T8	1/2"	96.1	19	31.5	9



MODEL	Hose T	DIMENSIONS(mm)			
		L	H	A	ØB
A13-H4	1/4"	93.1	19	28.5	4
A13-H5	5/16"	94.6	19	30	6
A13-H6	3/8"	96.1	19	31.5	7.5
A13-H8	1/2"	97.6	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
A13-P2	4 x 6	76.6	19	12	12	3
A13-P4	5 x 8	81	19	14	16.4	4
A13-P6	6.5 x 10	83.1	19	16	18.5	5
A13-P8	8 x 12	82.1	19	17	17.5	6.5

A SERIES (ARO) BALL-SWIVEL PLUG



- 360-degree rotation
- Free rotation angle up to 27 degrees
- Single swivel point for smooth movement
- Compatible with A-Series couplers (A32, A21)





MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
A12-F2	1/8" NPF	56.2	19	12
A12-F4	1/4" NPF	58.2	19	14
A12-F6	3/8" NPF	59.2	21	15
A12-F8	1/2" NPF	60.7	24	16.5





MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
A12-M2	1/8" NPT	54.7	19	10	5
A12-M4	1/4" NPT	60.7	19	13	7.5
A12-M6	3/8" NPT	61.7	19	14	10.5
A12-M8	1/2" NPT	63.7	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A12-T4	1/4"	71.2	19	22.5	4
A12-T5	5/16"	71.2	19	22.5	6
A12-T6	3/8"	76.9	19	28.2	7.5
A12-T8	1/2"	80.2	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A12-H4	1/4"	77.2	19	28.5	4.5
A12-H5	5/16"	78.7	19	30	6
A12-H6	3/8"	80.2	19	31.5	7.5
A12-H8	1/2"	81.7	19	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
A12-P2	4 x 6	60.7	19	12	12	3
A12-P4	5 x 8	65.1	19	14	16.4	4
A12-P6	6.5 x 10	67.2	19	16	18.5	5
A12-P8	8 x 12	66.2	19	17	17.5	6.5



A SERIES (ARO) SWIVEL PLUG


- Smooth 360-degree parallel rotation for effortless operation
- Compatible with A-Series couplers (A32, A21)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
A11-F2	1/8" NPF	48.2	17	12
A11-F4	1/4" NPF	50.2	17	14
A11-F6	3/8" NPF	52.2	21	15
A11-F8	1/2" NPF	54.2	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
A11-M2	1/8" NPT	44.2	14	10	5
A11-M4	1/4" NPT	47.2	14	13	7.5
A21-M6	3/8" NPT	48.2	17	14	10.5
A11-M8	1/2" NPT	50.2	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A11-T4	1/4"	56.7	15	22.5	4
A11-T5	5/16"	56.7	15	22.5	6
A11-T6	3/8"	59.4	15	28.2	7.5
A11-T8	1/2"	65.7	18	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A11-H4	1/4"	62.7	15	22.5	4
A11-H5	5/16"	64.2	15	22.5	6
A11-H6	3/8"	65.7	15	28.2	7.5
A11-H8	1/2"	67.2	18	31.5	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
A11-P2	4 x 6	50	17	12	12	3
A11-P4	5 x 8	53	17	14	15	4
A11-P6	6.5 x 10	56.5	17	16	18.5	5
A11-P8	8 x 12	56	19	17	17.5	6.5

A SERIES (ARO) STANDARD PLUG

- Compatible with A-Series couplers (A32, A21)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
A10-F2	1/8" NPF	36	17	12
A10-F4	1/4" NPF	38	17	14
A10-F6	3/8" NPF	39	21	15
A10-F8	1/2" NPF	42	24	16.5



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
A10-M2	1/8" NPT	39	14	10	5
A10-M4	1/4" NPT	41.5	14	13	7.5
A10-M6	3/8" NPT	43	17	14	10.5
A10-M8	1/2" NPT	46	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A10-T4	1/4"	51	15	22.5	4
A10-T5	5/16"	51	15	22.5	6
A10-T6	3/8"	57.2	15	28.2	7.5
A10-T8	1/2"	60.5	18	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
A10-H4	1/4"	54.5	15	22.5	4
A10-H5	5/16"	58.5	15	22.5	6
A10-H6	3/8"	57.5	15	28.2	7.5
A10-H8	1/2"	62	18	31.5	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
A10-P2	4 x 6	40	14	12	12	3
A10-P4	5 x 8	45.4	14	14	16.4	4
A10-P6	6.5 x 10	47.5	16	16	18.5	5
A10-P8	8 x 12	46.5	17	17	17.5	6.5

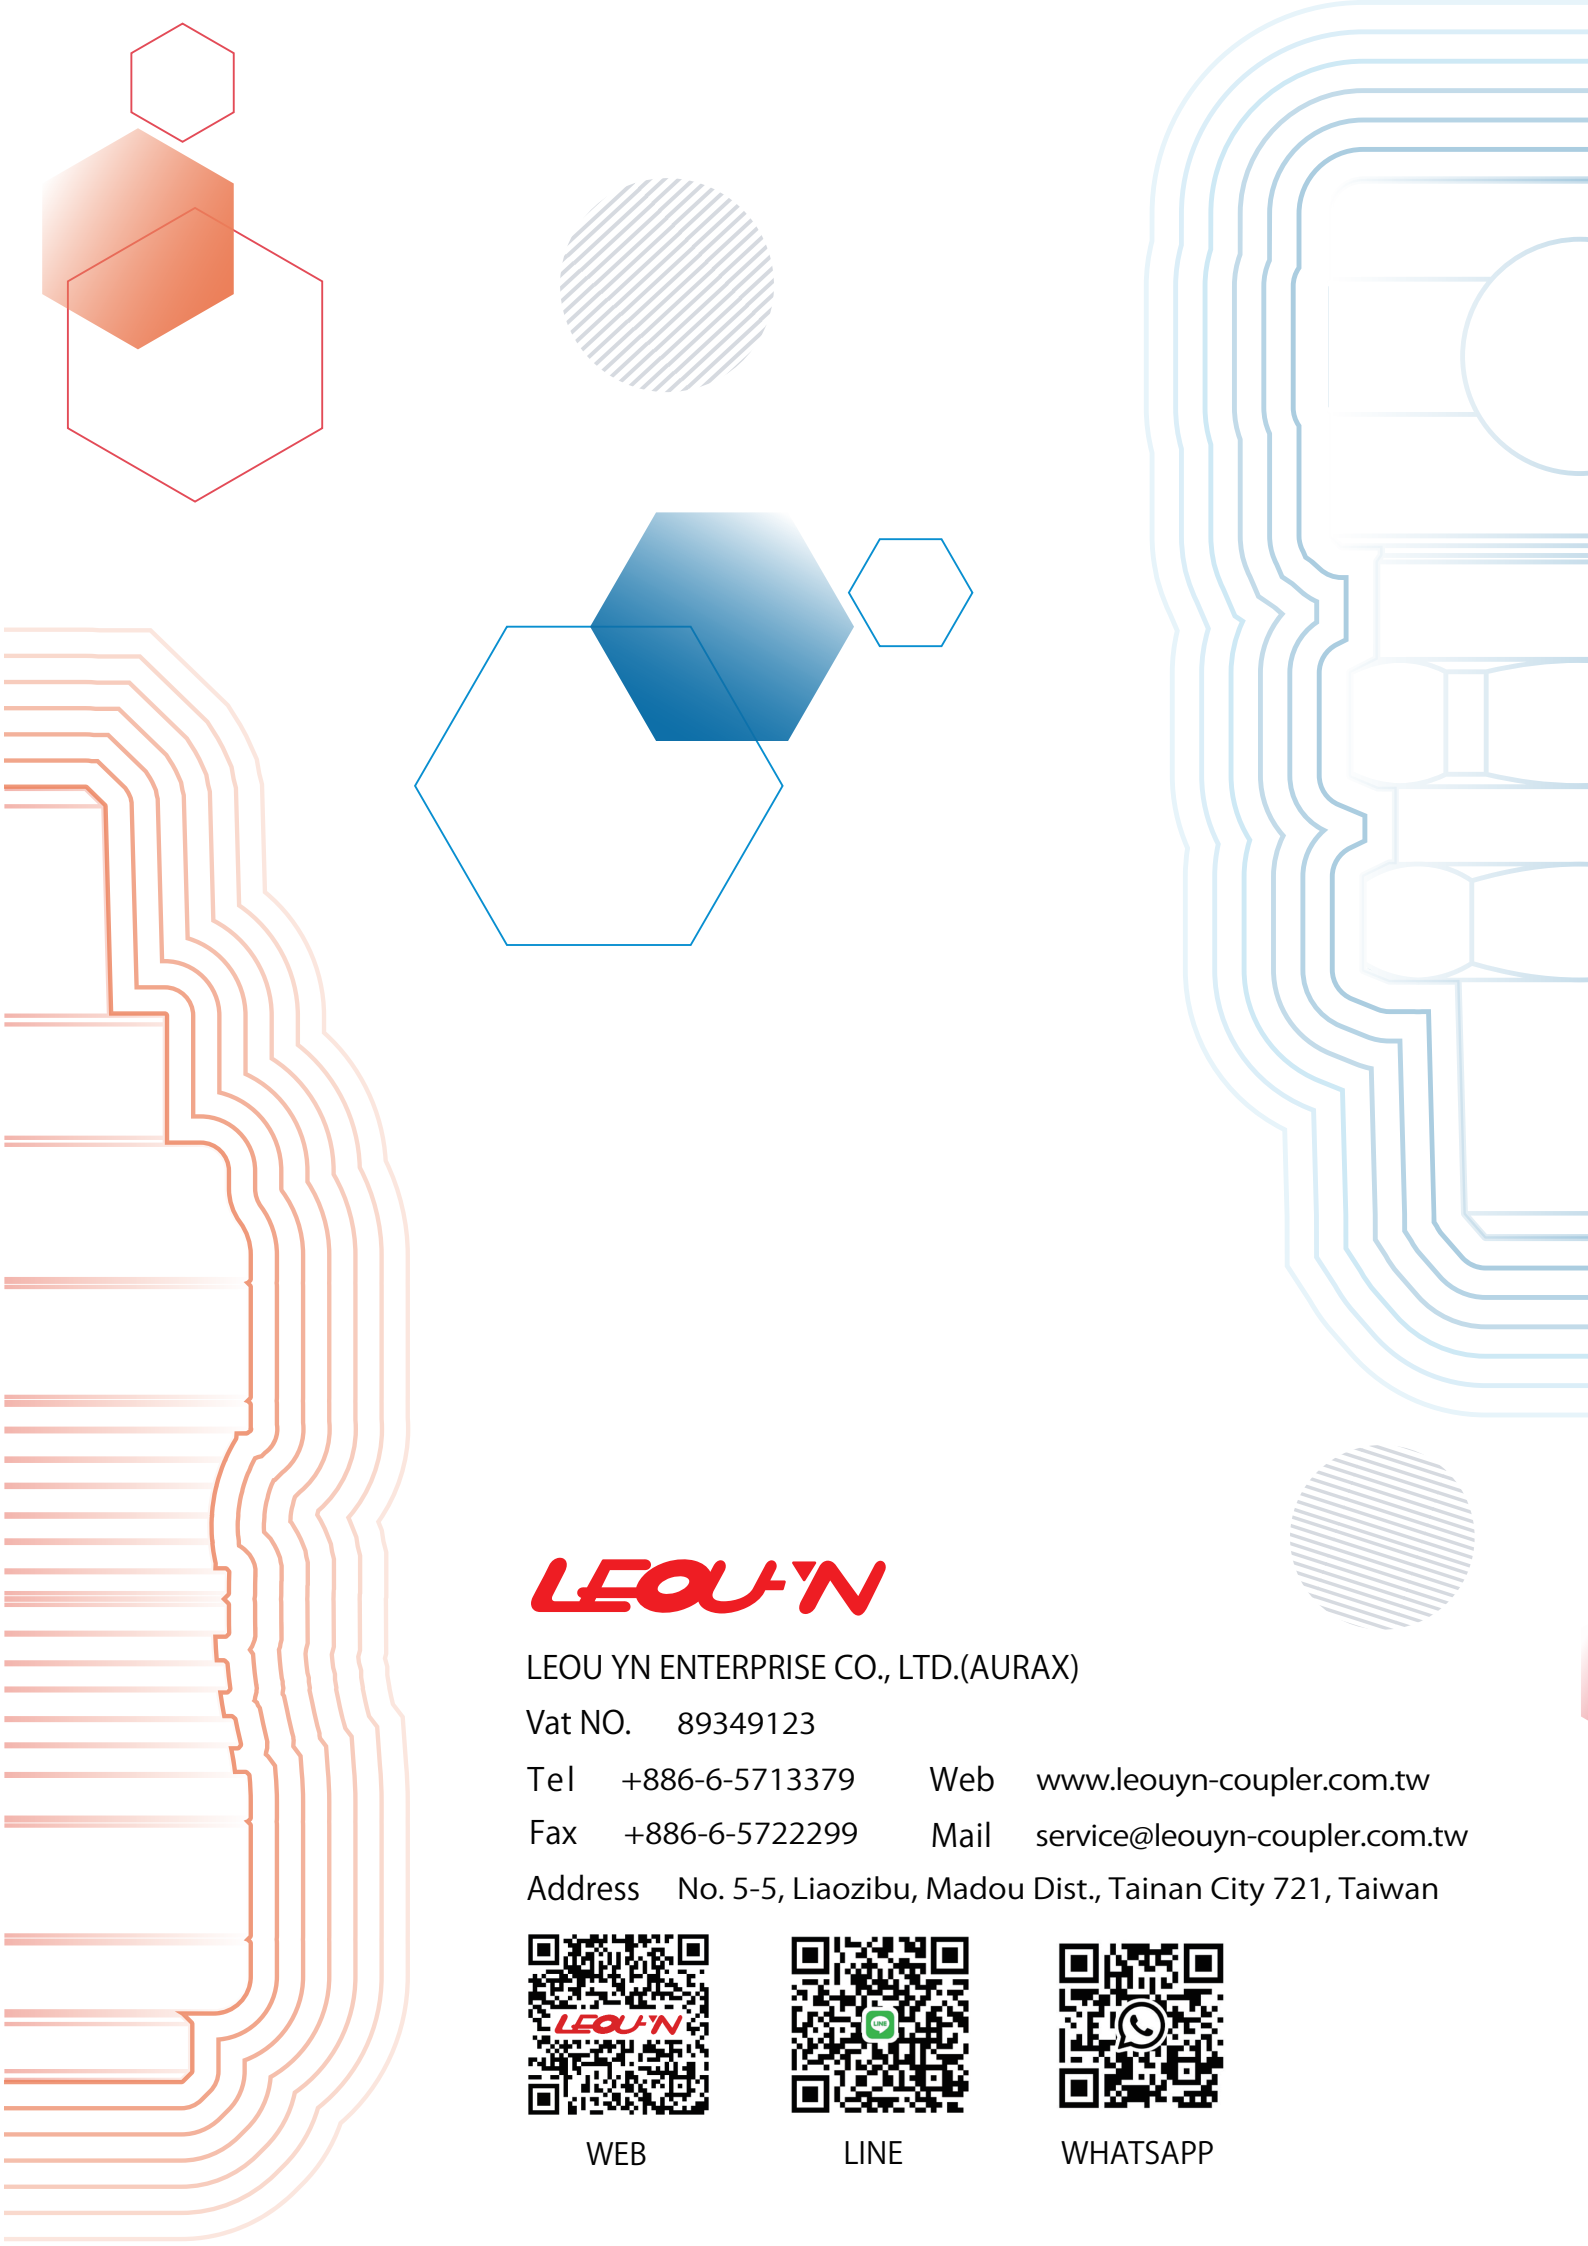

LEOUYN

LEOU YN ENTERPRISE CO., LTD.(AURAX)

Vat NO. 89349123

Tel +886-6-5713379

Web www.leouyn-coupler.com.tw

Fax +886-6-5722299

Mail service@leouyn-coupler.com.tw

Address No. 5-5, Liaozi bu, Madou Dist., Tainan City 721, Taiwan



WEB



LINE



WHATSAPP