



T SERIES **/ TURFLATE** **/ AUTOMOTIVE**

LEOUYN
LEOUYN ENTERPRISE CO., LTD.

T SERIES (TURFLATE / AUTOMOTIVE) SAFETY COUPLER

- One-push connection
- Safety design
- Compatible with T-Series plugs (T13, T12, T11, T10)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
T32-F2	1/8" NPF	69.5	19	12
T32-F4	1/4" NPF	69.5	19	14
T32-F6	3/8" NPF	70.5	19	15
T32-F8	1/2" NPF	72.5	22	16



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
T32-M2	1/8" NPT	71	19	10	5
T32-M4	1/4" NPT	74	19	13	7
T32-M6	3/8" NPT	75	19	14	8
T32-M8	1/2" NPT	77	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T32-T4	1/4"	83.5	19	22.5	4
T32-T5	5/16"	83.5	19	22.5	6
T32-T6	3/8"	89.2	19	28.2	7.5
T32-T8	1/2"	92.5	19	31.5	9




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T32-H4	1/4"	89.5	19	28.5	4.5
T32-H5	5/16"	91	19	30	5
T32-H6	3/8"	92.5	19	31.5	7.5
T32-H8	1/2"	94	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
T32-P2	4 x 6	73	19	12	12	3
T32-P4	5 x 8	76	19	14	15	4
T32-P6	6.5 x 10	79.5	19	16	18.5	5
T32-P8	8 x 12	78.5	19	17	17.5	6.5

T SERIES (TURFLATE / AUTOMOTIVE) ONE-TOUCH COUPLER


- One-push connection
- Compatible with T-Series plugs (T13, T12, T11, T10)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
T21-F2	1/8" NPF	50.9	19	12
T21-F4	1/4" NPF	52.9	19	14
T21-F6	3/8" NPF	56.9	21	15
T21-F8	1/2" NPF	57.9	24	16





MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
T21-M2	1/8" NPT	54.4	19	10	5
T21-M4	1/4" NPT	57.4	19	13	7.5
T21-M6	3/8" NPT	58.4	19	14	10.5
T21-M8	1/2" NPT	60.4	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T21-T4	1/4"	66.9	19	22.5	4
T21-T5	5/16"	66.9	19	22.5	6
T21-T6	3/8"	72.6	19	28.2	7.5
T21-T8	1/2"	75.9	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T21-H4	1/4"	72.9	19	28.5	4.5
T21-H5	5/16"	74.4	19	30	5
T21-H6	3/8"	75.9	19	31.5	7.5
T21-H8	1/2"	77.4	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
T21-P2	4 x 6	56.4	19	12	12	3
T21-P4	5 x 8	59.4	19	14	15	4
T21-P6	6.5 x 10	62.9	19	16	18.5	5
T21-P8	8 x 12	61.9	19	17	17.5	6.5



T SERIES (TURFLATE / AUTOMOTIVE) DUAL BALL-SWIVEL PLUG


- 360-degree rotation for maximum mobility
- Free rotation angle up to 54 degrees
- Dual swivel points for flexible movement
- Compatible with T-Series plugs (T32, T32)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
T13-F2	1/8" NPF	70.3	19	12
T13-F4	1/4" NPF	70.3	19	14
T13-F6	3/8" NPF	71.3	21	15
T13-F8	1/2" NPF	71.3	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
T13-M2	1/8" NPT	71.8	19	10	5
T13-M4	1/4" NPT	74.8	19	13	7.5
T13-M6	3/8" NPT	75.8	19	14	10.5
T13-M8	1/2" NPT	77.8	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T13-T4	1/4"	84.3	19	22.5	4
T13-T5	5/16"	84.3	19	22.5	6
T13-T6	3/8"	90	19	28.2	7.5
T13-T8	1/2"	93.3	19	31.5	9



MODEL	Hose T	DIMENSIONS(mm)			
		L	H	A	ØB
T13-H4	1/4"	90.3	19	28.5	4.5
T13-H5	5/16"	91.8	19	30	6
T13-H6	3/8"	93.3	19	31.5	7.5
T13-H8	1/2"	94.8	19	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
T13-P4	4 x 6	73.8	19	12	12	3
T13-P5	5 x 8	78.2	19	14	16.4	4
T13-P6	6.5 x 10	80.3	19	16	18.5	5
T13-P8	8 x 12	79.3	19	17	17.5	6.5

T SERIES (TURFLATE / AUTOMOTIVE) BALL-SWIVEL PLUG


- 360-degree rotation
- Free rotation angle up to 27 degrees
- Single swivel point for smooth movement
- Compatible with T-Series plugs (T32, T32)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
T12-F2	1/8" NPF	54.4	19	12
T12-F4	1/4" NPF	58.4	19	14
T12-F6	3/8" NPF	56.4	21	15
T12-F8	1/2" NPF	57.9	24	16.5



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
T12-M2	1/8" NPT	54.9	19	10	5
T12-M4	1/4" NPT	57.9	19	13	7.5
T12-M6	3/8" NPT	58.9	19	14	10.5
T12-M8	1/2" NPT	60.9	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T12-T4	1/4"	68.4	19	22.5	4
T12-T5	5/16"	68.4	19	22.5	6
T12-T6	3/8"	74.1	19	28.2	7.5
T12-T8	1/2"	77.4	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T12-H4	1/4"	74.4	19	28.5	4.5
T12-H5	5/16"	75.9	19	30	6
T12-H6	3/8"	78.4	19	31.5	7.5
T12-H8	1/2"	78.9	19	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
T12-P4	4 x 6	57.9	19	12	12	3
T12-P5	5 x 8	62.3	19	14	16.4	4
T12-P6	6.5 x 10	64.4	19	16	18.5	5
T12-P8	8 x 12	63.4	19	17	17.5	6.5

T SERIES (EUROPEAN) SWIVEL PLUG

- Smooth 360-degree parallel rotation for effortless operation
- Compatible with T-Series plugs (T32, T32)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
T11-F2	1/8" PF	50	17	12
T11-F4	1/4" PF	52	17	14
T11-F6	3/8" PF	54	21	15
T11-F8	1/2" PF	56	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
T11-M2	1/8" PT	46	14	10	5
T11-M4	1/4" PT	49	14	13	7.5
T11-M6	3/8" PT	50	17	14	10.5
T11-M8	1/2" PT	52	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T11-T4	1/4"	58.5	15	22.5	4
T11-T5	5/16"	58.5	15	22.5	6
T11-T6	3/8"	64.2	15	28.2	7.5
T11-T8	1/2"	67.5	18	31.5	9




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T11-H4	1/4"	64.5	15	28.5	4.5
T11-H5	5/16"	66	15	30	6
T11-H6	3/8"	67.5	15	31.5	7.5
T11-H8	1/2"	69	18	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
T11-P4	4 x 6	51.8	17	12	12	3
T11-P5	5 x 8	54.8	17	14	15	4
T11-P6	6.5 x 10	58.3	17	16	18.5	5
T11-P8	8 x 12	57.3	19	17	17.5	6.5

T SERIES (TURFLATE / AUTOMOTIVE) STANDARD PLUG


- Compatible with T-Series plugs (T32, T32)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
T10-F2	1/8" NPF	33.2	17	12
T10-F4	1/4" NPF	35.2	17	14
T10-F6	3/8" NPF	36.2	21	15
T10-F8	1/2" NPF	39.2	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
T10-M2	1/8" NPT	35.7	14	10	5
T10-M4	1/4" NPT	38.7	14	13	7.5
T10-M6	3/8" NPT	40.2	17	14	10.5
T10-M8	1/2" NPT	43.2	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T10-T4	1/4"	48.2	15	22.5	4
T10-T5	5/16"	48.2	15	22.5	6
T10-T6	3/8"	54.4	15	28.2	7.5
T10-T8	1/2"	57.7	18	31.5	9




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
T10-H4	1/4"	51.7	15	22.5	4
T10-H5	5/16"	55.7	15	22.5	6
T10-H6	3/8"	57.7	15	28.2	7.5
T10-H8	1/2"	59.2	18	31.5	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
T10-P2	4 x 6	37.2	14	12	12	3
T10-P4	5 x 8	42.6	14	14	16.4	4
T10-P6	6.5 x 10	44.7	16	16	18.5	5
T10-P8	8 x 12	43.7	17	17	17.5	6.5



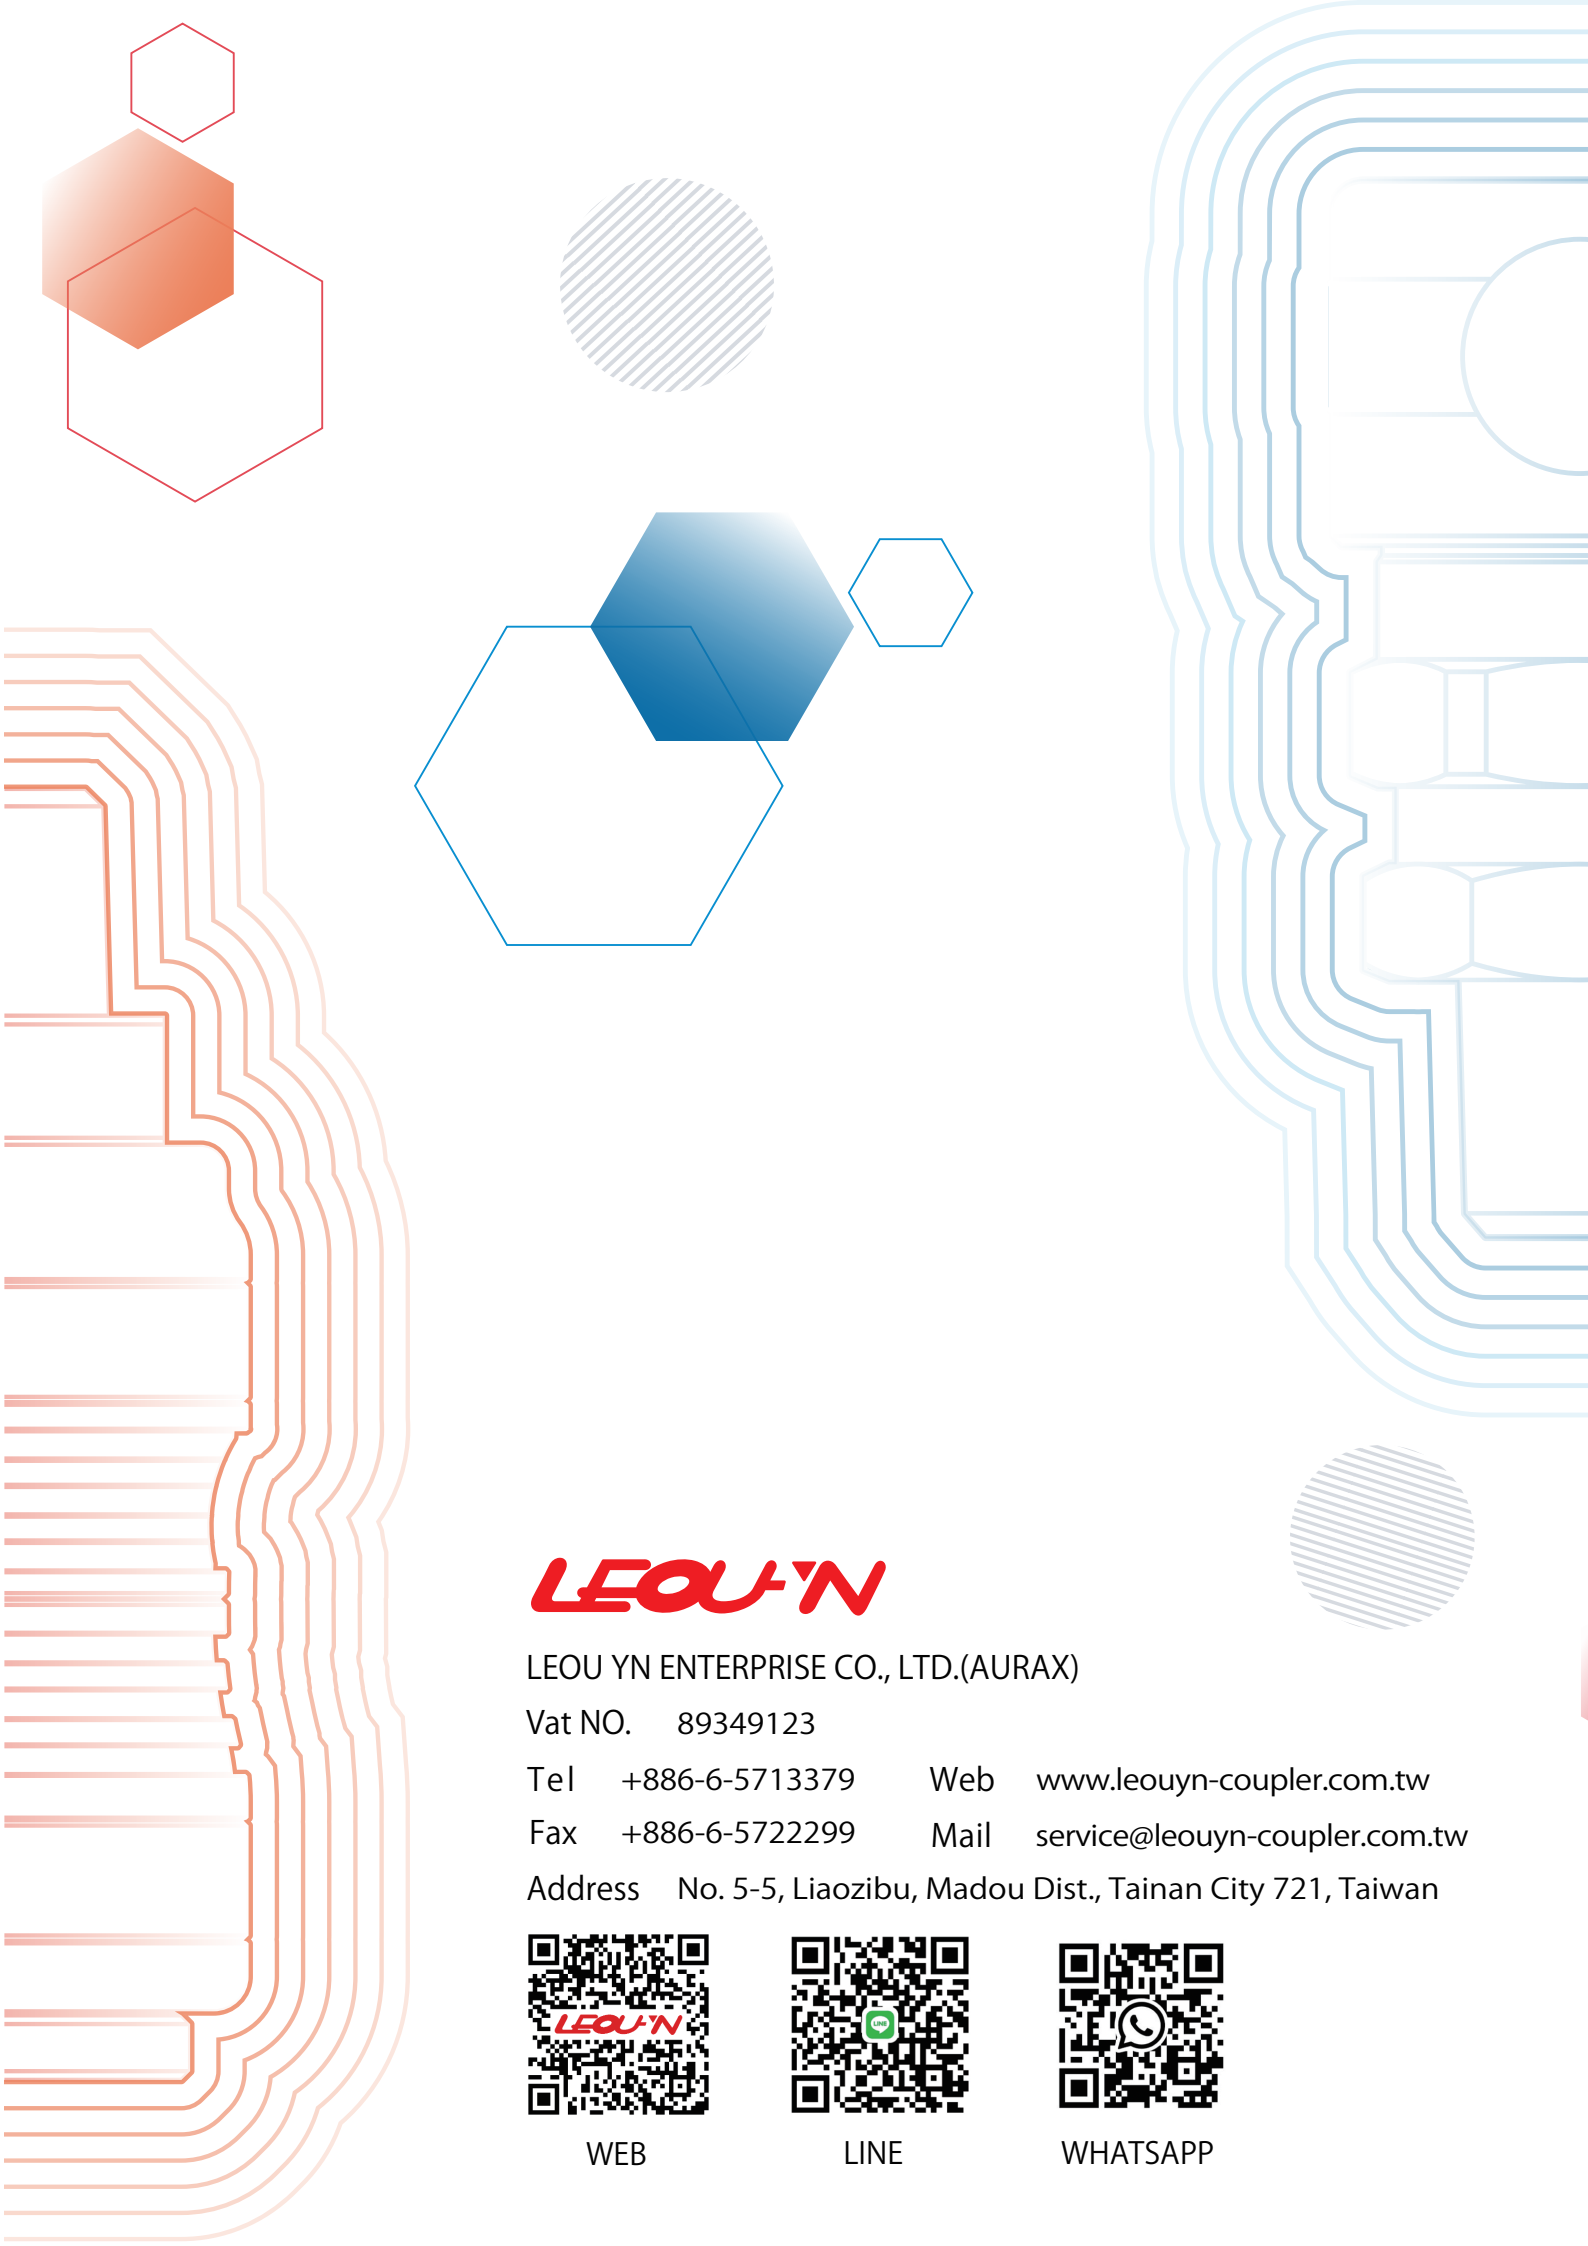

LEOUYN

LEOU YN ENTERPRISE CO., LTD.(AURAX)

Vat NO. 89349123

Tel +886-6-5713379

Web www.leouyn-coupler.com.tw

Fax +886-6-5722299

Mail service@leouyn-coupler.com.tw

Address No. 5-5, Liaozi bu, Madou Dist., Tainan City 721, Taiwan



WEB



LINE



WHATSAPP